


## MODULINE™ Multi-Bag Filter Housing System

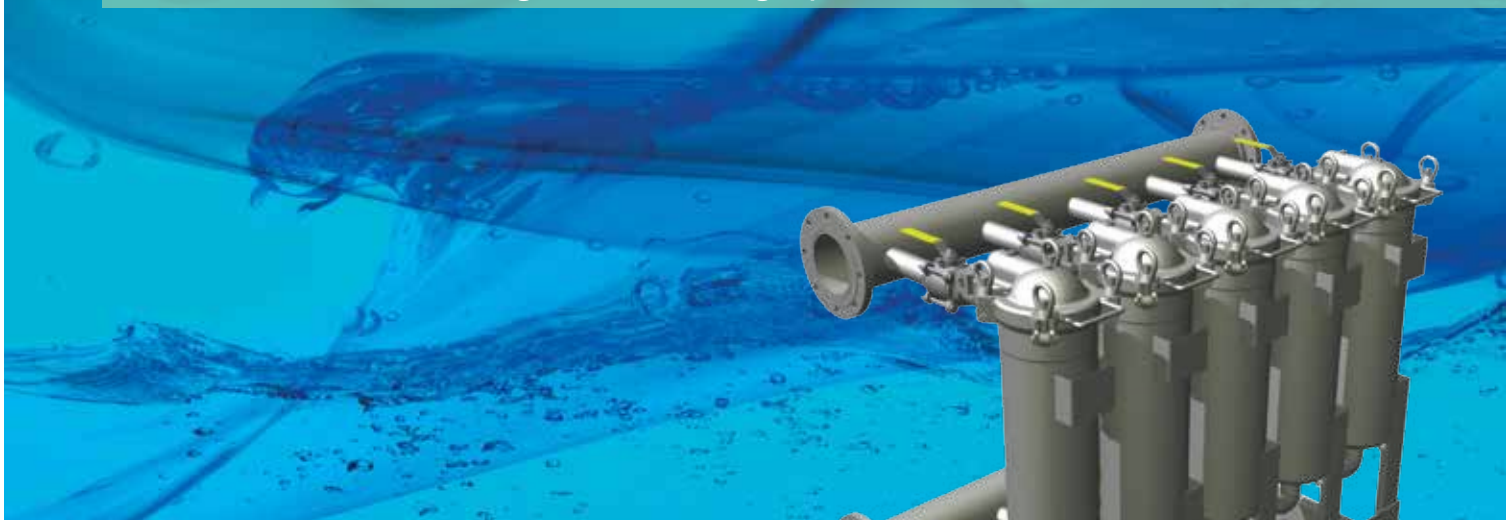

*Modular system for continuous flow capability, higher efficiency and lower costs*

Eaton's MODULINE multi-bag filter housing systems are double or modular multi-bag units designed for applications where the flow rate is too high for a single bag filter housing.

This multi-bag filter housing system provides a compact and efficient assembly of two up to eight single bag filter housings. Its space-saving design can be readily expanded with additional housing units and extra banks to provide the highest level of flexibility for process requirements. The footprint is smaller than duplexed multi-bag filter housings. Units come standard with filter bag size 02 stainless steel restrainer baskets.

### Features

- Can be equipped with the economical FLOWLINE™ or FLOWLINE II™\* single bag filter housing for coarse particle filtration, the SIDELINE™ single bag filter housing for a greater range of applications or the most advanced TOPLINE™ single bag filter housing

- System arrangement assures continuous flow rates. Each unit is individually valved and can be taken off-line in sequence for filter bag change-outs without having to take the complete bank of filters off-line
- Swing bolt cover for quick, easy filter bag change-outs. The TOPLINE single bag filter housing features a domed cover. FLOWLINE and SIDELINE single bag filter housings covers' feature an integrated ergonomic handle
- TOPLINE and SIDELINE models are designed in accordance with Section VIII, Division 1 of the ASME Code (standard in the US), "AD 2000-Merkblätter", EN 13445 and PED (standard in EMEA)

- Easy-action, 1/4-turn ball valves provide precision flow control
- Smooth, bead-blasted finish makes it easy to completely clean the interior

### Options

- Available in stainless steel for high corrosion resistance. Carbon steel version available in the US
- Buna-N® O-rings for the cover are standard. EPDM, Viton®, PTFE encapsulated Viton or silicone rubber seals and gaskets are available
- Optional gauges, vents and pressurize air port with 1/4" threaded cover taps

\* Available in the US only. Viton® is a registered trademark of E. I. du Pont de Nemours and company.

# EATON

Powering Business Worldwide


# MODULENE Multi-Bag Filter Housing System

## Applications

Coarse filtration > 500 µm	✓
Medium filtration > 10 µm	
Fine filtration < 10 µm	
Pre-filtration	✓
Safety filtration	✓
High volume	✓
Batch filtration	
Circuit filtration	
Continuous filtration	✓
Solvents, paints	
Fats and oils	✓
Catalyst, activated carbon	
Acids, bases	
Petrochemicals	✓
Water, waste water	✓
Chemical industry	✓
Pharmaceuticals	
Metal cleaning	✓
Automotive	✓
Electronics	
Food and beverage	
Paint and lacquer	
Water treatment	✓
Galvanic industry	

## Dimensions for MODULENE multi-bag filter housing using TOPLINE single bag filter housings

Details on MODULENE multi-bag filter housing assemblies using SIDELINE and FLOWLINE single bag filter housings available on request.

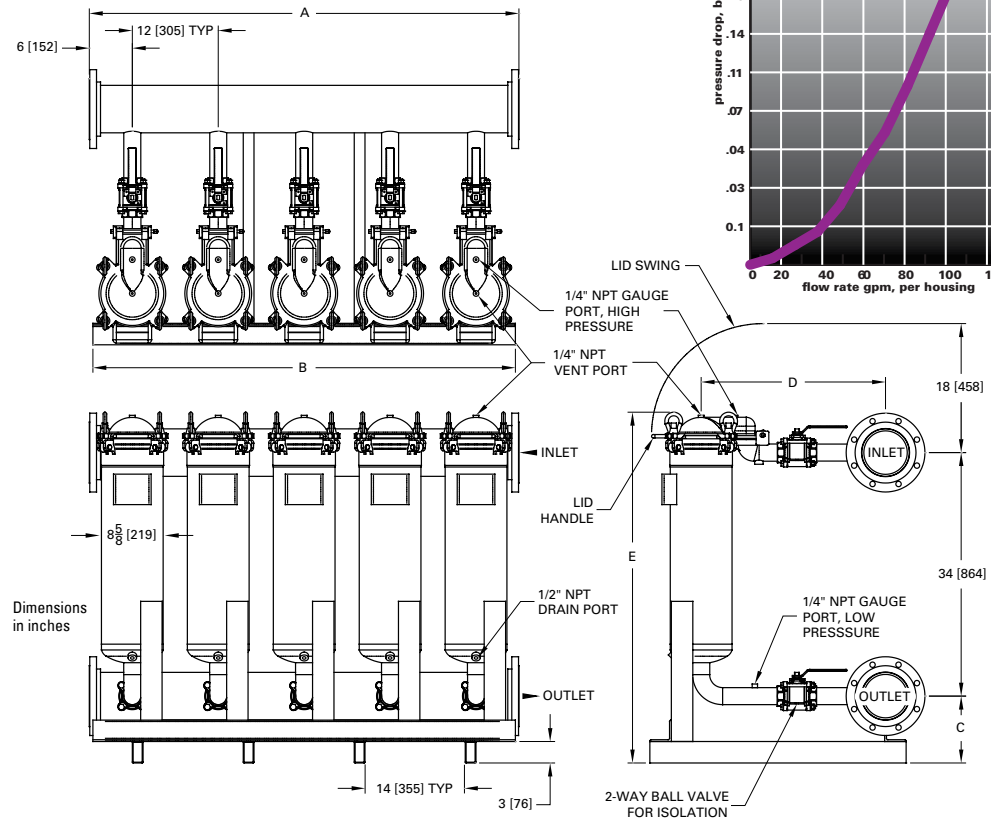

## Technical data MODULENE systems with TOPLINE housings

Models	No. of filter bags	Size	Flow rates <sup>1</sup> GPM (m <sup>3</sup> /h)	Housing volume gal (l)	Housing weight lb (kg)	Max. pressure psi (bar)	Max. temp. <sup>2</sup> °F (°C)	I/O connections	Dimensions - in (mm)				
									A	B	C	D	E
M-TBF-0202	2	2	353 (80)	16.5 (62.5)	320 (145.1)	150 (10)	400 (160)	3" flange	24 (610)	23 (584)	7-3/4 (197)	24-3/16 (614)	47-1/2 (1,207)
M-TBF-0302	3	2	528 (120)	25.7 (104.9)	490 (222.3)	150 (10)	400 (160)	4" flange	36 (914)	35 (889)	8-1/4 (210)	24-11/16 (627)	48 (1,219)
M-TBF-0402	4	2	705 (160)	35 (132.5)	630 (285.8)	150 (10)	400 (160)	4" flange	48 (1,219)	47 (1,194)	8-1/4 (210)	24-11/16 (627)	48 (1,219)
M-TBF-0502	5	2	881 (200)	54.2 (205.2)	800 (362.9)	150 (10)	400 (160)	6" flange	60 (1,524)	59 (1,499)	9-5/16 (236)	25-3/4 (654)	49-1/16 (1,246)
M-TBF-0602	6	2	1,057 (240)	65.5 (248)	950 (430.9)	150 (10)	400 (160)	6" flange	72 (1,829)	71 (1,803)	9-5/16 (236)	25-3/4 (654)	49-1/16 (1,246)
M-TBF-0702	7	2	1,233 (280)	76.7 (290.3)	1,100 (499)	150 (10)	400 (160)	6" flange	84 (2,134)	83 (2,108)	9-5/16 (236)	25-3/4 (654)	49-1/16 (1,246)
M-TBF-0802	8	2	1,409 (320)	86 (325.6)	1,250 (567)	150 (10)	400 (160)	6" flange	96 (2,438)	95 (2,413)	9-5/16 (236)	25-3/4 (654)	49-1/16 (1,246)

<sup>1</sup> Maximum theoretical flow based on water viscosity, filter bag specific. <sup>2</sup> Depending on seal material. Metric measures represent comparable products produced for EMEA and may not be an exact conversions.

**North America**  
44 Apple Street  
Tinton Falls, NJ 07724  
Toll Free: 800 656-3344  
(North America only)  
Tel: +1 732 212-4700

**Europe/Africa/Middle East**  
Auf der Heide 2  
53947 Nettersheim, Germany  
Tel: +49 2486 809-0

**Internormen** Product Line  
Friedensstraße 41  
68804 Altludersheim, Germany  
Tel: +49 6205 2094-0

**Begerow** Product Line  
An den Nahewiesen 24  
55450 Langenlonsheim, Germany  
Tel: +49 6704 204-0

**China**  
No. 3, Lane 280,  
Linhong Road  
Changning District, 200335  
Shanghai, P.R. China  
Tel: +86 21 5200-0099

**Singapore**  
4 Loyang Lane #04-01/02  
Singapore 508914  
Tel: +65 6825-1668

**Brazil**  
Av. Julia Gaioli, 474 – Bonsucesso  
07251-500 – Guarulhos, Brazil  
Tel: +55 11 2465-8822

For more information, please email us at [filtration@eaton.com](mailto:filtration@eaton.com) or visit [www.eaton.com/filtration](http://www.eaton.com/filtration)

© 2014 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

US  
EF-FBH-16  
10-2014